


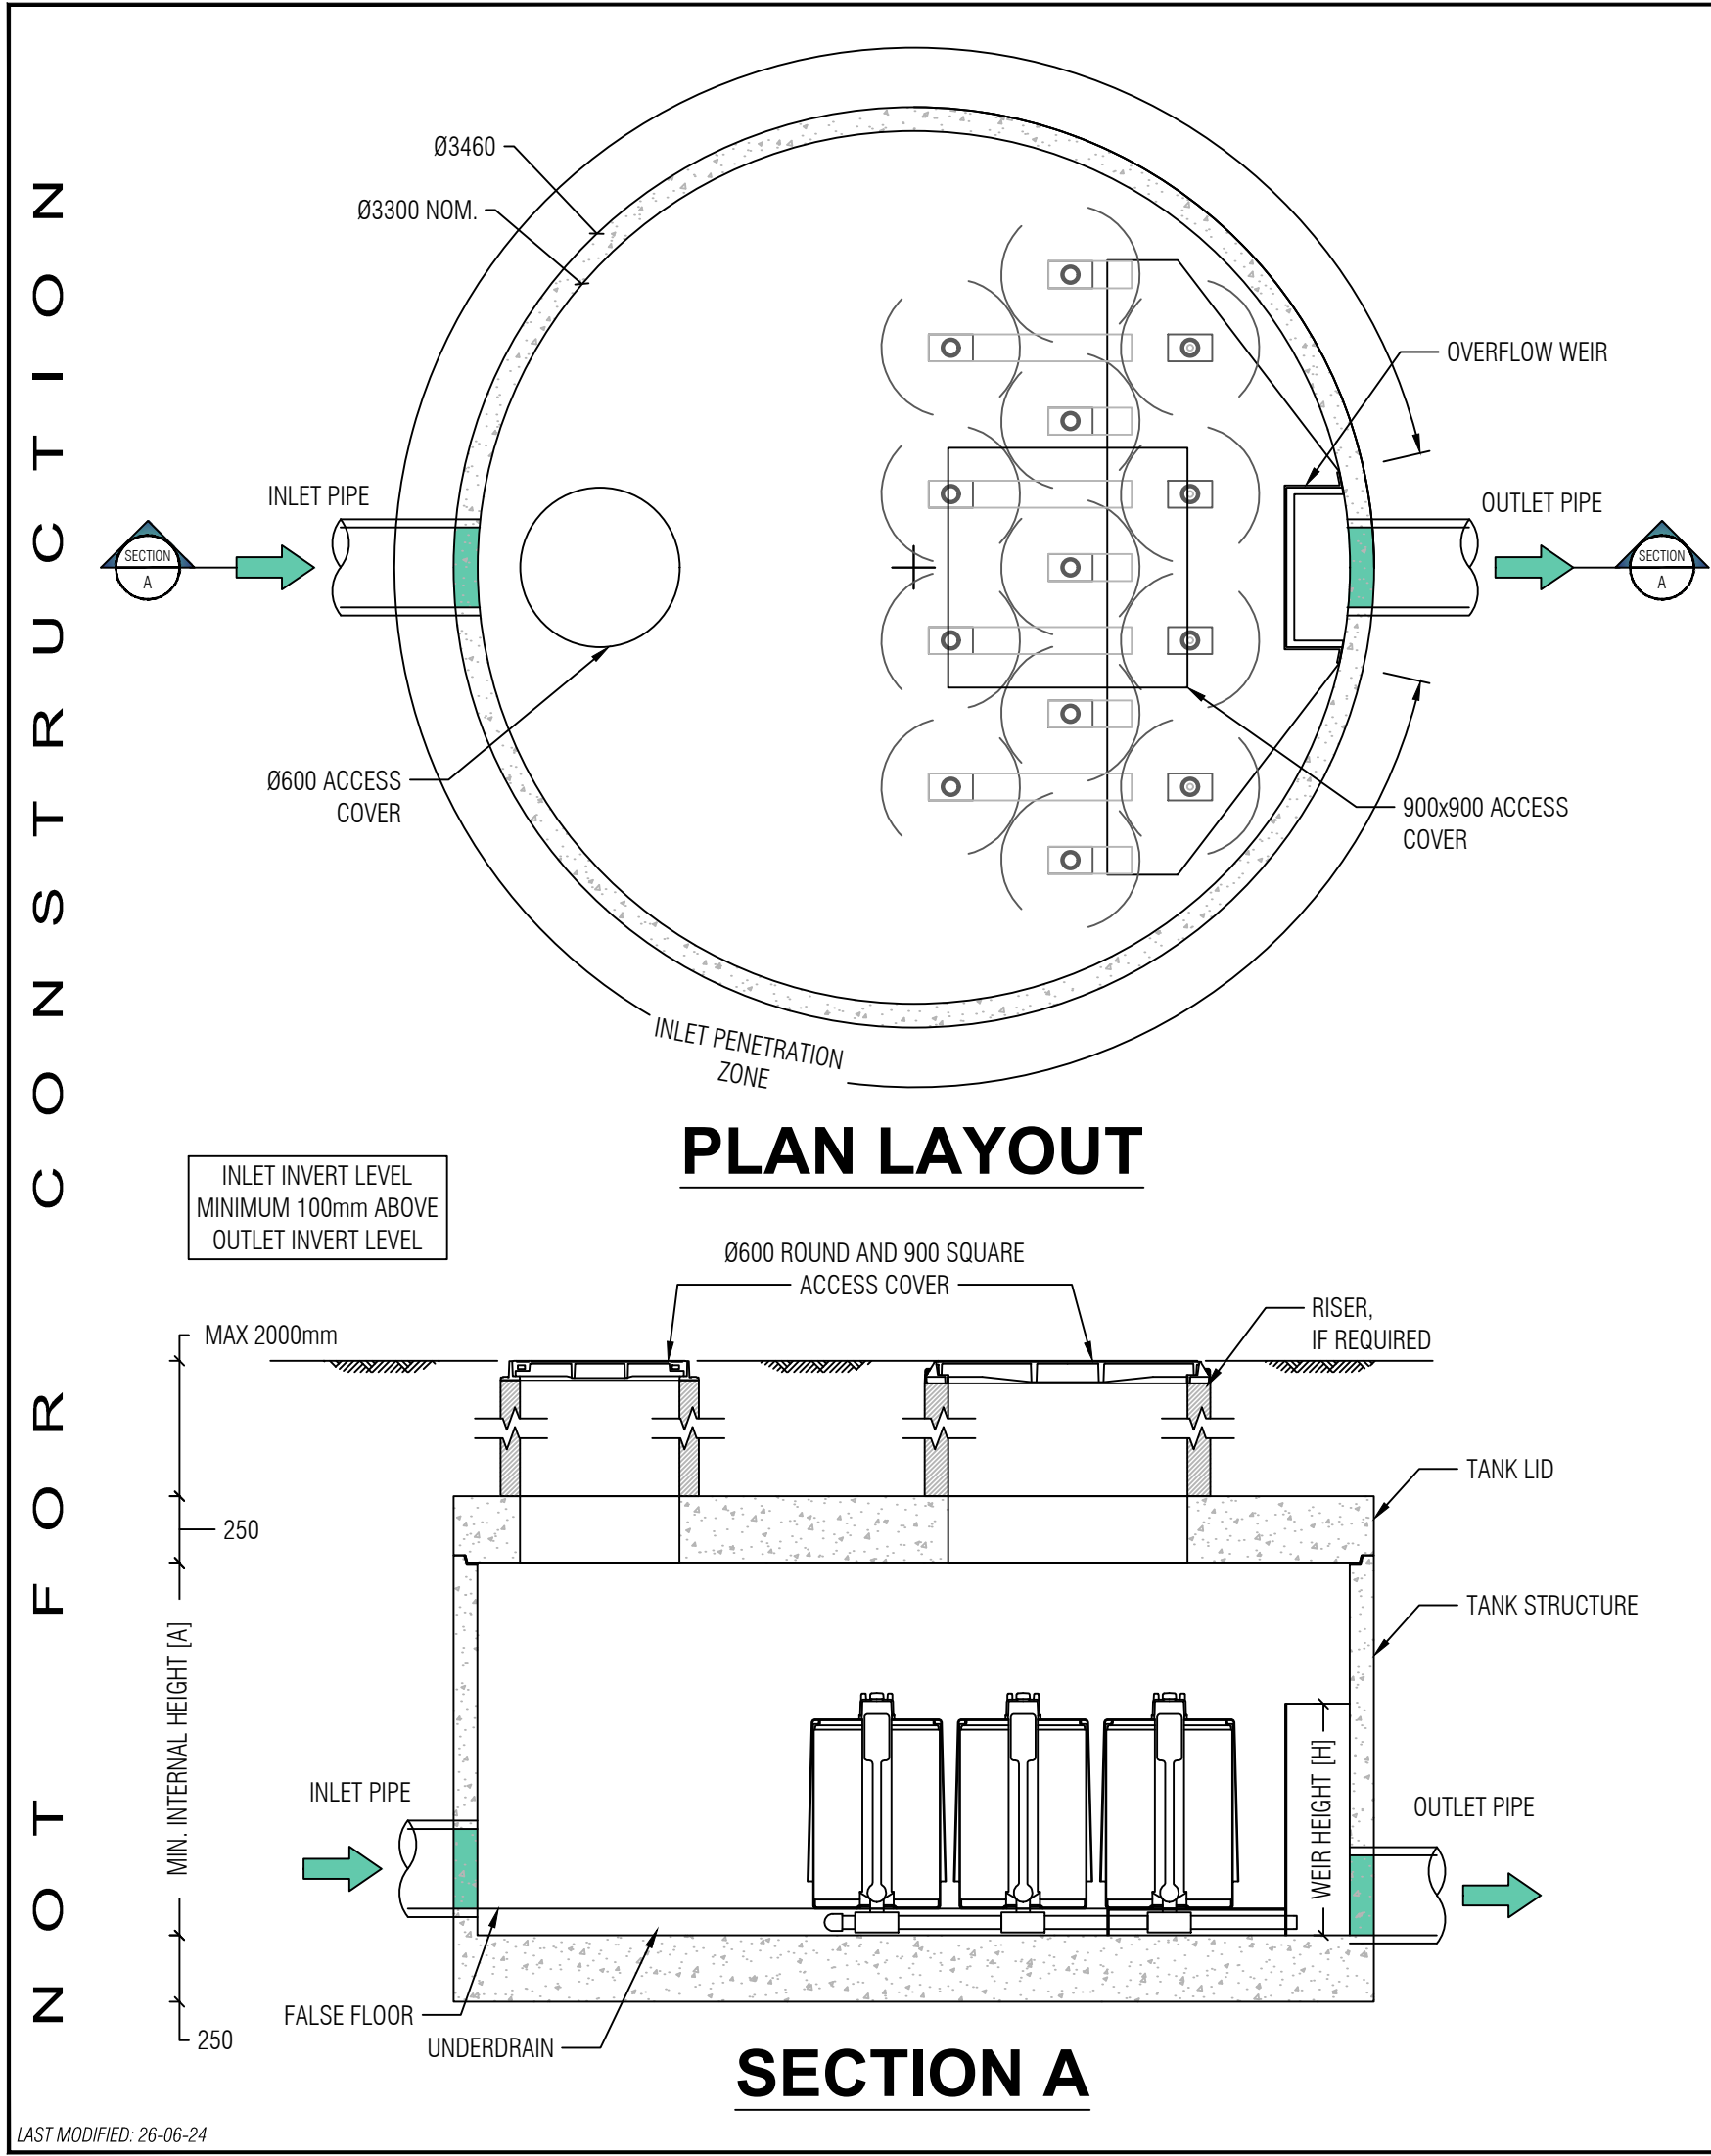

STORMFILTER DESIGN PARAMETERS

- STORMFILTER TREATMENT CAPACITY VARIES BY NUMBER OF FILTER CARTRIDGES INSTALLED.
- THE STANDARD CONFIGURATION IS SHOWN. ACTUAL CONFIGURATION OF THE SPECIFIED STRUCTURE(S) PER CERTIFYING ENGINEER WILL BE SHOWN ON SUBMITTAL DRAWING(S).
- FILTER CARTRIDGES SHALL BE MEDIA-FILLED, PASSIVE, SIPHON ACTUATED, RADIAL FLOW, AND SELF-CLEANING. RADIAL MEDIA DEPTH SHALL BE 178mm.

NUMBER OF CARTRIDGES		13
HYDRAULIC CAPACITY (L/S)		90
MAX. COMPONENT WEIGHT (kg) *MASS VARIABLE		13000
TANK LID WEIGHT (kg)		5100

CARTRIDGE NAME / SIPHON HEIGHT (mm)	690	460	310
CARTRIDGE PHYSICAL HEIGHT (mm)	840	600	600
TYPICAL WEIR HEIGHT [H] (mm)	920	690	540
MINIMUM INTERNAL HEIGHT [A] (mm)	1100	850	850
CARTRIDGE FLOW RATE FOR NPSORB MEDIA (L/s)	1.60	1.10	0.70
CARTRIDGE FLOW RATE FOR PSORB (MCC) MEDIA (L/s)	0.90	0.46	0.39
CARTRIDGE FLOW RATE FOR PSORB (SQIDEP) MEDIA (L/s)	1.26	0.86	0.60
CARTRIDGE FLOW RATE FOR ZPG MEDIA (L/s)	1.60	1.10	0.70

- GENERAL NOTES/ STRUCTURAL DESIGN CRITERIA**
- PRECAST STRUCTURE SUPPLIED WITH PENETRATIONS TO SUIT OUTER DIAMETER OF NOMINATED PIPE SIZE / MATERIAL.
 - PRECAST STRUCTURE SHALL MEET W80 WHEEL LOAD RATING ASSUMING A MAXIMUM EARTH COVER OF 2.0m AND A GROUND WATER ELEVATION AT, OR BELOW, THE OUTLET PIPE INVERT ELEVATION. CERTIFYING ENGINEER TO CONFIRM ACTUAL GROUNDWATER ELEVATION. PRECAST STRUCTURE SHALL BE IN ACCORDANCE WITH AS3600.
 - PRECAST STRUCTURE SHALL BE PLACED ON A STABLE GROUND WITH A MINIMUM SOIL BEARING CAPACITY OF 125kPa UNDER NORMAL SERVICE CONDITION.
 - IF THE PEAK FLOW RATE, AS DETERMINED BY THE SITE CERTIFYING ENGINEER, EXCEEDS THE PEAK HYDRAULIC CAPACITY OF THE SYSTEM, AN UPSTREAM BYPASS STRUCTURE IS REQUIRED.
 - ALL WATER QUALITY TREATMENT DEVICES REQUIRE PERIODIC MAINTENANCE. REFER TO THE OPERATION AND MAINTENANCE MANUAL FOR GUIDELINES AND ACCESS REQUIREMENTS.
 - SITE-SPECIFIC PRODUCTION DRAWING WILL BE PROVIDED UPON PLACEMENT OF ORDER.
 - DRAWING NOT TO SCALE.
- INSTALLATION NOTES**
- ANY SUB-BASE, BACKFILL DEPTH, AND/OR ANTI-FLOTATION PROVISIONS ARE SITE-SPECIFIC DESIGN CONSIDERATIONS AND SHALL BE SPECIFIED BY CERTIFYING ENGINEER.
 - CONTRACTOR TO PROVIDE ALL EQUIPMENT WITH SUFFICIENT LIFTING AND REACH CAPACITY TO LIFT AND SET THE STORMFILTER STRUCTURE (LIFTING DETAIL PROVIDED SEPARATELY).
 - CONTRACTOR TO APPLY SEALANT TO ALL JOINTS AND TO PROVIDE, INSTALL, AND GROUT INLET AND OUTLET PIPES.