


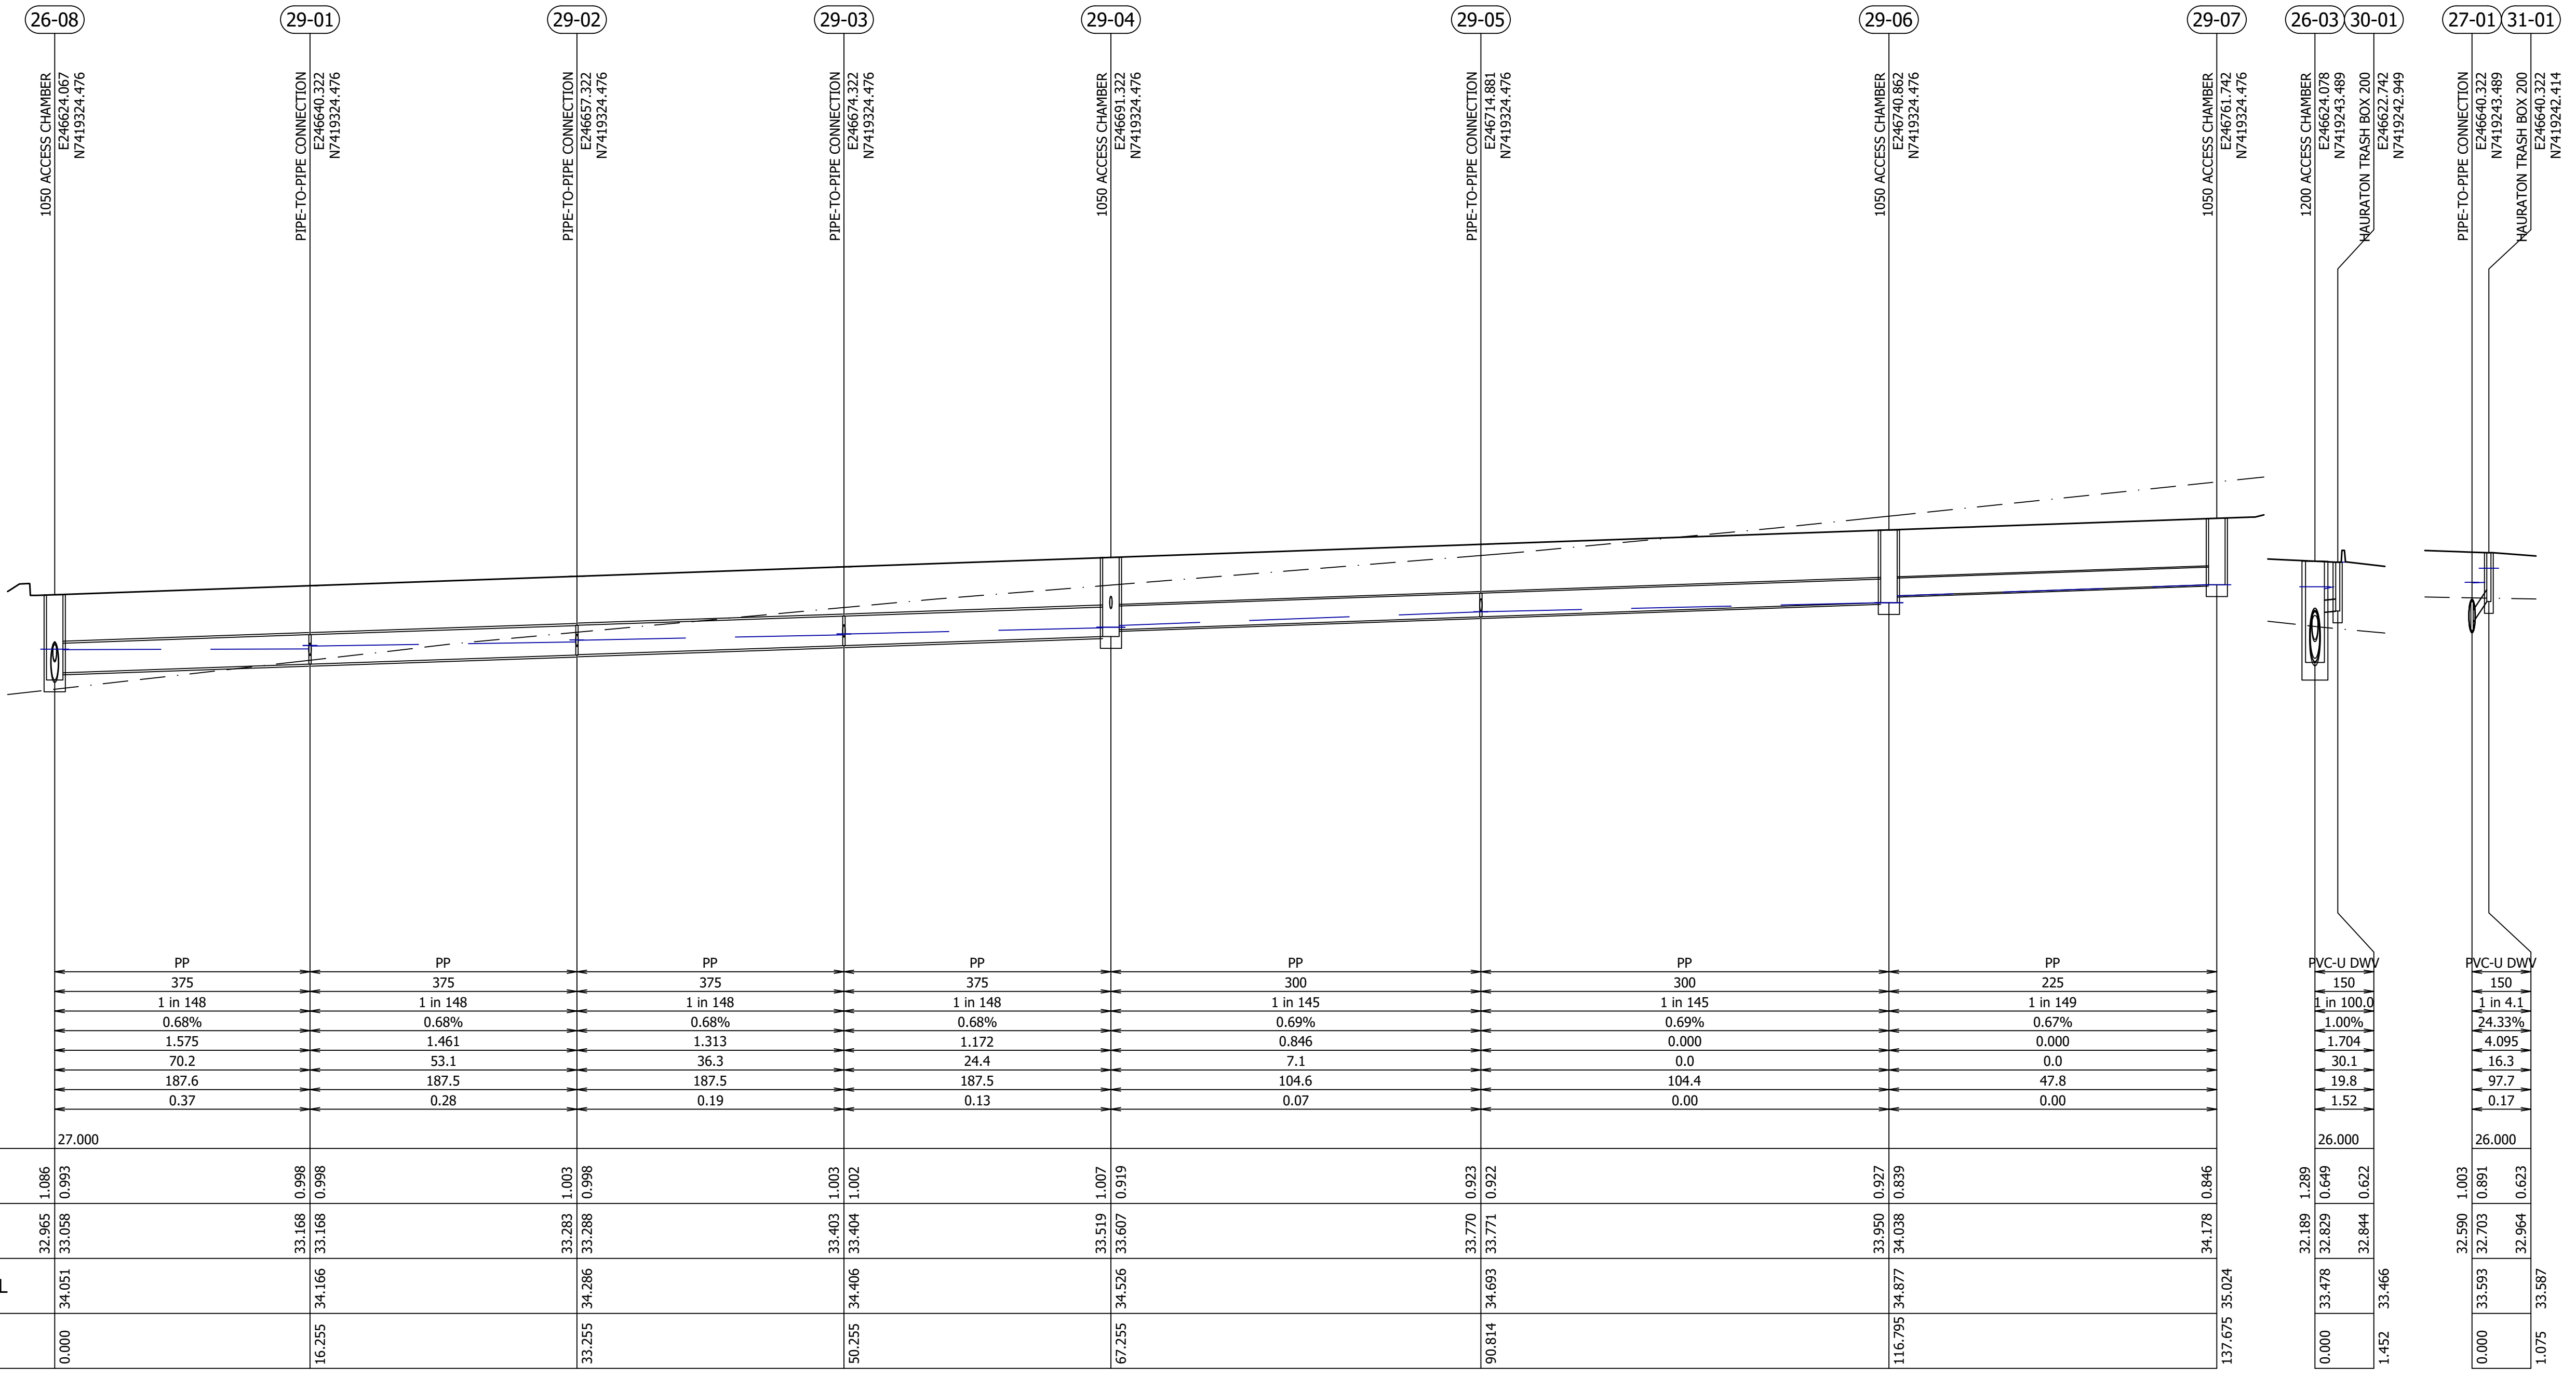

TYPE
SIZE (mm)
PIPE GRADE
GRADE (%)
VELOCITY (m/s)
DESIGN FLOW (L/s)
FLOW CAPACITY (L/s)
CAPACITY RATIO

	PP	PP	PP	PP	PP	PP	PP	PP		
	375	375	375	375	300	300	225			
	1 in 148	1 in 148	1 in 148	1 in 148	1 in 145	1 in 145	1 in 149			
	0.68%	0.68%	0.68%	0.68%	0.69%	0.69%	0.67%			
	1.575	1.461	1.313	1.172	0.846	0.000	0.000			
	70.2	53.1	36.3	24.4	7.1	0.0	0.0			
	187.6	187.5	187.5	187.5	104.6	104.4	47.8			
	0.37	0.28	0.19	0.13	0.07	0.00	0.00			
DATUM RL	27.000									
DEPTH FSL TO INVERT	32.965 1.086 33.058 0.993	33.168 0.998 33.168 0.998	33.283 1.003 33.288 0.998	33.403 1.003 33.404 1.002	33.519 1.007 33.607 0.919	33.770 0.923 33.771 0.922	33.950 0.927 34.038 0.839	34.178 0.846		
DESIGN INVERT LEVEL										
FINISHED SURFACE LEVEL	34.051	34.166	34.286	34.406	34.526	34.693	34.877	35.024		
LENGTH/CHAINAGE	0.000	16.255	33.255	50.255	67.255	90.814	116.795	137.675		

HORIZONTAL SCALE 1:250
VERTICAL SCALE 1:50

NOT FOR CONSTRUCTION



T1	17/06/26	TPC	JZV	JDH	ISSUE FOR TENDER
Issue	Date	By	Chkd	Appd	Description

Job Title
ROCKHAMPTON
NETBALL CENTRE

Drawing Title
STORMWATER DRAINAGE
LONG SECTIONS
SHEET 9

Discipline
CIVIL AND FIELD OF PLAY
Drawing Status
ISSUE FOR TENDER
Drawing Number
SE_12306_F1358

Issue
T1