



10 July 2026

Our Ref: 16699

TENDER NUMBER TEN16699

ROCKHAMPTON SPORTS PRECINCT – STAGE 1 NETBALL

ADDENDUM NO. 7

Dear Tenderer,

This addendum forms part of, and is to be read in conjunction with, Invitation to Tender No. TEN16699

For all interested parties intending to tender for the ROCKHAMPTON SPORTS PRECINCT – STAGE 1 NETBALL, please find included with this addendum the following clarifications to assist with your tender submission:

- 1. Drawings LD-003 & LD-004 are missing from the Landscape drawing file. Please provide.**

This is an error with the coversheet and that these drawings do not exist. Please find revised coversheet attached.

- 2. Please confirm size of Submains from DB-NBC to Netball Court Distribution Boards (DB-FNB.1, DB-FNB.2 & DB-FNB.3) all other cable sizes are provided. DWG – 25015-E-Site-304**

See Drawing 25105-E-NBC-002

- 3. Due to the collapsible sand on the site (indicted by the Geotech report) - bored piers are not recommended by our subcontractors due to instability during installation. Would a screw pile option be accepted, and if so please confirm the design loads for design & construct pricing for this element.**

Screw piles can be considered as an acceptable alternative to bored piers for this project. However, the Contractor will be responsible for all design, cost and construction of this alternative design (including cost of required design actions on piles from the design consultant, as required). The design will need to be equivalent or better than the detailed design provided in the tender documentation. Please note the reasoning and benefits for the change should be called out in the tender submission for consideration.

- 4. Confirm Stage 1A external works includes for ALL civil preparation (clearing / site infrastructure works) and stormwater works including grassed swales for stormwater management. Stage 2A external works are limited to landscaping inc. Fixtures/equipment & irrigation**

Please refer section 6 of technical specification, extract shown below, and drawing SE_12306_SKT_CMP.

6. SEPARATION OF STAGE 1A AND STAGE 1B

For tendering purposes, the Project has been divided into Stage 1A and Stage 1B in accordance with the relevant plan drawings (Sub-stages Sketch Plan - se_12306_skt_cmp).

Refer to Tender Schedule 3 – Schedule of Prices and Rates, specifically Stage 1A Item 2.1 (Mains Connections), for pricing. In the event that components of Stage 1B do not progress to award, pricing should allow for the installation of mains connections through Stage 1B in accordance with the drawings and specifications.

Connections associated with Stage 1B are to be excluded from Stage 1A pricing, as they will be captured separately within the Stage 1B pricing schedule for clarity.

As stated only clearing works required for the service connections installation across 1B will be required in stage 1A.

5. Please provide more information regarding the intended use of the Projector Wall nominated in the Landscape Drawings to direct this scope.

Projector wall will provide a surface for public screening such as movies and live sport with spectators occupying the surrounding lawn area. The wall will be directly projected onto i.e no drop-down screen required. It therefore shall be a smooth, shadow free and neutrally coloured surface.

6. Landscape Drawings do not have any of the play/recreation/furniture/structure elements labelled in the layout plans. Please provide an updated drawing with these elements identified.

Please find attached revisions of Landscape drawings that include identification of elements as requested – SE_12306_TC004_RSP Stage 1 Landscape Drawings (Rev T2)

7. On drawing number 25015-E-NBC-004, it is noted "PA System Existing" can you please confirm what the existing PA system is?

This is an error in wording, there is no existing PA system, refer to Electrical Services Specification 29. PA System for details

8. AV Integration - What is the existing AV system and where is it located?

There is no existing AV system, refer to Electrical Services Specification 28. AV System for details.


9. Can you please confirm if the existing building as shown located beside the existing Childcare Centre is to be demolished As per the Site Electrical Services drawing; 25015-E-SITE-202. The building is shown to be demolished on this drawing, however is not detailed on any other drawings to be demolished.

The building will not be demolished as a part of this project.

10. The Reflected Ceiling Plan AR-NBC-1100 shows access panels within Grid Tile Ceilings – can you please confirm these are required as drawn?

Confirming there is no requirement for Access Panels within areas that have a grid tile ceiling – Multipurpose room, Officials Room, Unisex C/R.03/0.4, Admin and Tournament office or the First Aid room.

11. Please confirm that the new Telstra Fibre Manhole lead in pits are by Telstra/ NBN and not part of this scope – lead in conduits to boundary only as part of this scope?

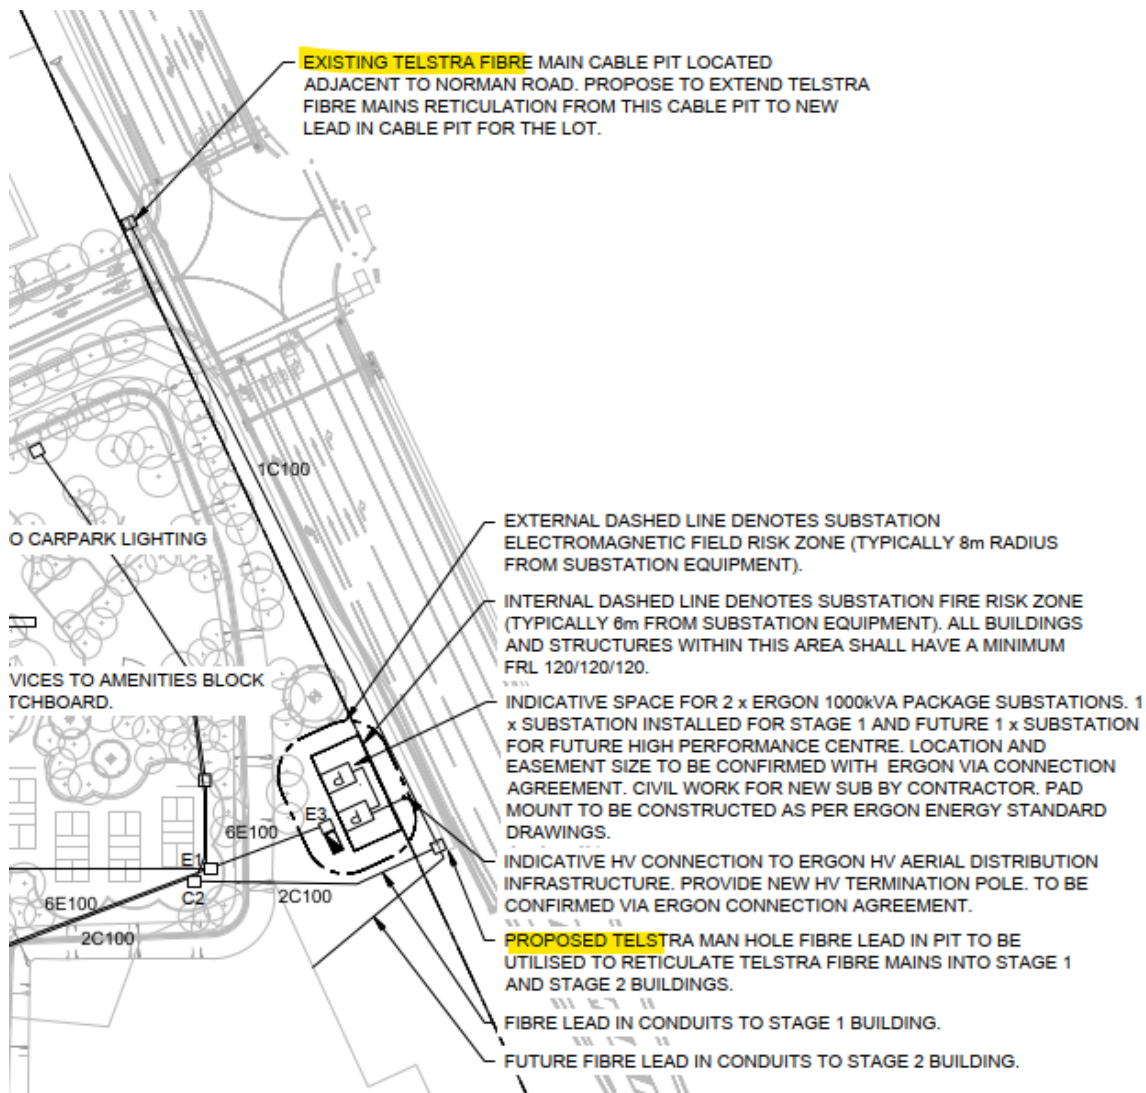

New lead in pit to boundary is part of Telstra / NBN Scope. This work will need to be arranged and coordinated by the contractor. Please refer relevant sections of specifications.

Electrical Spec:


32.1.3 Carrier Lead in pathway from the property boundary (or designated carrier connection point) to the MDF.

32.1.8: Lead-in conduits from the street network to the building's MDF shall be engineered to the requirements of the supplying carrier (typically NBN Co, Telstra, Optus, and/or other fibre providers). Noting that 'Lead-in pathways are Carrier Network Infrastructure and must be coordinated with the relevant carrier(s) at concept design. Lodgement of the Site Plan and Developer's Deed with the carrier shall be included in the Contractor's programme.'

12. They call for square/round perforations in the Woodworks feature tile ceiling, can you please provide the shape and size hole for the perforation?

Refer to the finishes schedule for the feature tile ceiling specifications, shape is round in square formation, with holes 12.5mm CC. Standard hole is 6mm.

https://armstrongceilings.com.au/wp-content/uploads/DS_WoodWorks-FR-Lay-In-and-Direct-Mount-Panels.pdf

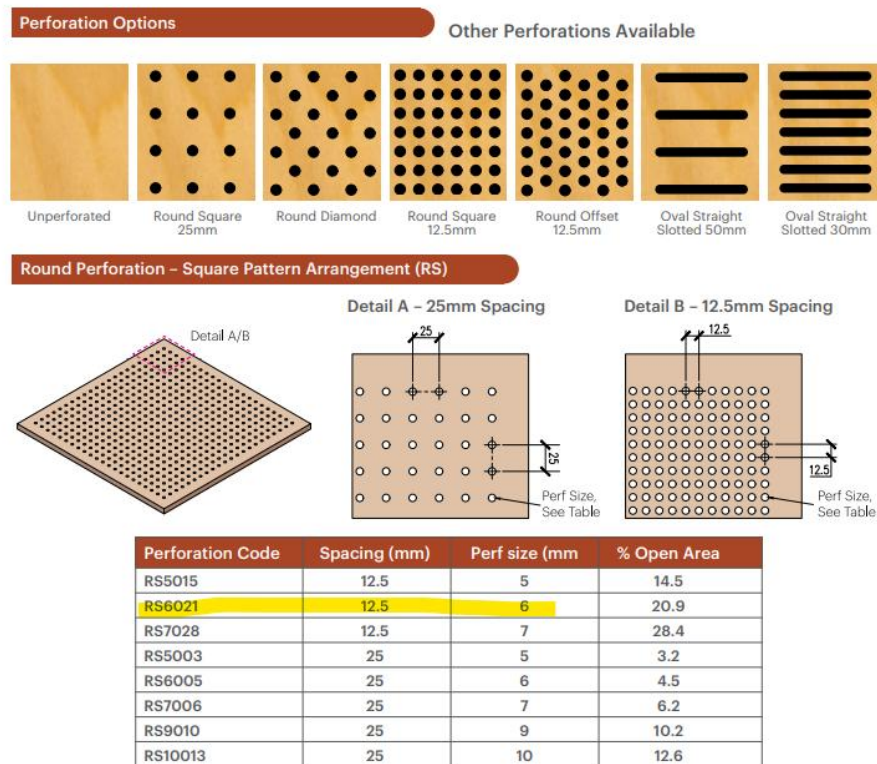

13. Drawing LD-2105 - The small connecting path in the upper middle section (connected to the double door fencing) is shown as LHS3, which per the schedule is stamped asphalt. However, the civil drawing (SE_12306_F1600) shows concrete pavement for this area.

Could council please confirm the correct surface finish for the path so we can ensure our pricing reflects the intended scope?

Finish as per Civil Drawings SE_12306_F1600 – LHS4

14. Drawing LD-2104 - The path at the bottom right corner (connecting the hatched carpark area to the tennis courts) has a symbol indicating LHS3, however the label reads LHS4. Could council please clarify which surface finish applies to this path?

If it is LHS3, the schedule indicates stamped asphalt, however the civil drawing (SE_12306_F1602) shows concrete pavement, not asphalt.

Finish as per Civil Drawings SE_12306_F1602 – LHS4

- 15. With reference to the civil drawings (F1604), the path from the netball courts to the district park area 2 is labelled as a Type 3 Asphalt Acrylic Courts.**

However, according to the landscape drawings (LD-2105), this path is labelled as LHS3 which is a stamped asphalt with decorative colour application. Please clarify.

Finish as per Civil Drawings SE_12306_F1604 Type 3 Asphalt Acrylic Courts.

- 16. Please confirm what spread rates and mix rates will apply to the stabilization portion of the project? Will blanket rates apply across the project, or will they vary due to insitu CBR values of material?**

Refer to Civil Specification Section 5. Stabilisation, to be determined by trials.

- 17. Please provide more detail for kerb-type locations. Some cross sections for the roads show the kerb and channel requirements, however, no other information is given showing types and locations for the project.**

Refer to Setout Plan F1222 as noted set out plans or as per note 'all Type 1 unless otherwise noted'.

- 18. Please confirm that establishment of new HV cabling easement shown on E-Site-202 is by others/ Ergon and not part of elec scope?**

As per plans all aerial works are to be conducted by ergon. Coordination of this work by Contractor

Please note that receipt of this Addendum must be acknowledged when submitting your tender. For this purpose, acknowledgment of Addendum No. 7 is also attached for completion and return with your Tender Submission.

Yours faithfully



Marie Grund
Contracts & Tenders Supervisor

INVITATION TO TENDER NO.: 16699

ROCKHAMPTON SPORTS PRECINCT – STAGE 1 NETBALL

ACKNOWLEDGEMENT OF ADDENDUM

This page is to be inserted in the Tender Submission Document directly in front of the Tender Form if applicable or in front of any other Acknowledgment of Addenda which has previously been issued.

ADDENDUM NO.7

Receipt of the above addendum is acknowledged.

NAME OF TENDERER:

SIGNATURE: _____ FOR AND ON BEHALF OF

TENDERER: _____

DATE: _____